


Spool-/Reel-Types

for Precision Flat Wire

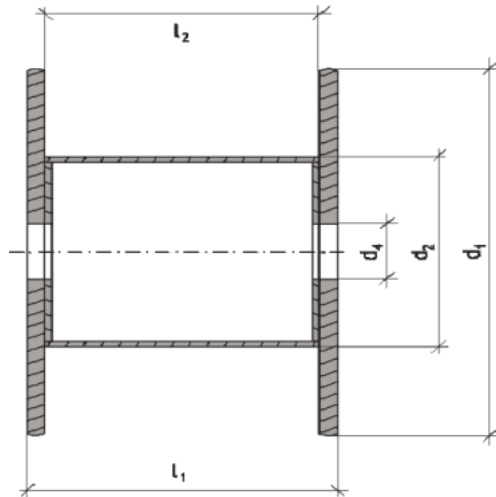

Typ K 100

d₁ 100 mm
d₂ 63 mm
d₄ 16 mm
l₁ 100 mm

Netto: ~1.3 kg / 2.8 lbs
Tara : 0.13 kg / 0.3 lbs



Typ K 125

d₁ 125 mm
d₂ 80 mm
d₄ 15 mm
l₁ 125 mm

Netto: ~2.3 kg / 5.1 lbs
Tara : 0.2 kg / 0.5 lbs



Typ K 160

d₁ 160 mm
d₂ 100 mm
d₄ 20 mm
l₁ 160 mm

Netto: ~5.0 kg / 11 lbs
Tara : 0.4 kg / 0.8 lbs



Typ K 200

d₁ 200 mm
d₂ 125 mm
d₄ 20 mm
l₁ 200 mm

Netto: ~11 kg / 24 lbs
Tara : 0.6 kg / 1.3 lbs



Typ B 20/46

d₁ 200 mm
d₂ 100 mm
d₄ 46 mm
l₁ 115 mm

Netto: ~8 kg / 18 lbs
Tara : 0.45 kg / 1.0 lbs



Typ K 250

d₁ 250 mm
d₂ 160 mm
d₄ 20 mm
l₁ 200 mm

Netto: ~18 kg / 40 lbs
Tara : 1.4 kg / 3.1 lbs



Typ SD 300 K

d₁ 300 mm
d₂ 212 mm
d₄ 51.5 mm
l₁ 103 mm

Netto: ~12 kg / 26 lbs
Tara : 0.7 kg / 1.5 lbs



Typ SH 390 K

d₁ 390 mm
d₂ 310 mm
d₄ 305 mm
l₁ 89 mm

Netto: ~15 kg / 33 lbs
Tara : 0.6 kg / 1.2 lbs

Spool-/Reel-Types

for Precision Flat Wire



Typ SH 460 K

d ₁	460 mm
d ₂	319 mm
d ₄	305 mm
l ₁	105 mm

Netto: ~40 kg / 80 lbs
Tara : 1.8 kg / 4.0 lbs



Typ DWF 355/30, 36

d ₁	355 mm
d ₂	224 mm
d ₄	30 mm, 36 mm
l ₁ / l ₂	200/160 mm

Netto: ~40 kg / 80 lbs
Tara : 3.2 kg / 7.1 lbs



Typ DWF 500 / 36

d ₁	500 mm
d ₂	315 mm
d ₄	36 mm
l ₁	250 mm

Netto: ~90 kg / 200 lbs
Tara : 7.6 kg / 17 lbs



Typ S41

d ₁	750 mm
d ₂	485 mm
d ₄	400 mm
l ₁	190 mm

Netto: ~180 kg / 400 lbs
Tara : 18 kg / 39 lbs



Typ A1

d ₁	750 mm
d ₂	485 mm
d ₄	400 mm
l ₁	340 mm

Netto: ~400 kg / 880 lbs
Tara : 25 kg / 55 lbs



Typ A2

d ₁	740 mm
d ₂	485 mm
d ₄	400 mm
l ₁	290 mm


Netto: ~300 kg / 660 lbs
Tara : 22 kg / 49 lbs



Typ 760 / 33

d ₁	760 mm
d ₂	400 mm
d ₄	33 mm
l ₁	287 mm

Netto: ~250 kg / 550 lbs
Tara : 40 kg / 88 lbs



Ring / Coil / Couronne

d ₁	≤ 635 700 mm
d ₂	400 480 mm
d ₄	
l ₁	170...300 mm

Netto: ≤ 400 kg / 880 lbs
[2.00 x 0.60 ... 4.50 x 1.20 mm]

Shipment in lattice box or on euro-pallets.

Flat wire bars up to 4'000 mm in length.

Other spools or delivery types upon request