


## Spulentypen

für Präzisions-Flachdraht

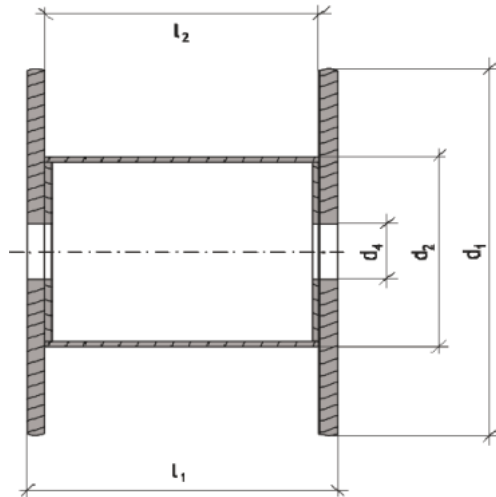

### Typ K 100

$d_1$  100 mm  
 $d_2$  63 mm  
 $d_4$  16 mm  
 $l_1$  100 mm

Netto: ~1.3 kg / 2.8 lbs  
Tara : 0.13 kg / 0.3 lbs



### Typ K 125

$d_1$  125 mm  
 $d_2$  80 mm  
 $d_4$  15 mm  
 $l_1$  125 mm

Netto: ~2.3 kg / 5.1 lbs  
Tara : 0.2 kg / 0.5 lbs



### Typ K 160

$d_1$  160 mm  
 $d_2$  100 mm  
 $d_4$  20 mm  
 $l_1$  160 mm

Netto: ~5.0 kg / 11 lbs  
Tara : 0.4 kg / 0.8 lbs



### Typ K 200

$d_1$  200 mm  
 $d_2$  125 mm  
 $d_4$  20 mm  
 $l_1$  200 mm

Netto: ~11 kg / 24 lbs  
Tara : 0.6 kg / 1.3 lbs



### Typ B 20/46

$d_1$  200 mm  
 $d_2$  100 mm  
 $d_4$  46 mm  
 $l_1$  115 mm

Netto: ~8 kg / 18 lbs  
Tara : 0.45 kg / 1.0 lbs



### Typ K 250

$d_1$  250 mm  
 $d_2$  160 mm  
 $d_4$  20 mm  
 $l_1$  200 mm

Netto: ~18 kg / 40 lbs  
Tara : 1.4 kg / 3.1 lbs



### Typ SD 300 K

$d_1$  300 mm  
 $d_2$  212 mm  
 $d_4$  51.5 mm  
 $l_1$  103 mm

Netto: ~12 kg / 26 lbs  
Tara : 0.7 kg / 1.5 lbs



### Typ SH 390 K

$d_1$  390 mm  
 $d_2$  310 mm  
 $d_4$  305 mm  
 $l_1$  89 mm

Netto: ~15 kg / 33 lbs  
Tara : 0.6 kg / 1.2 lbs

## Spulentypen

für Präzisions-Flachdraht



### Typ SH 460 K

|                |        |
|----------------|--------|
| d <sub>1</sub> | 460 mm |
| d <sub>2</sub> | 319 mm |
| d <sub>4</sub> | 305 mm |
| l <sub>1</sub> | 105 mm |

Netto: ~40 kg / 80 lbs  
Tara : 1.8 kg / 4.0 lbs



### Typ DWF 355/30, 36

|                                 |              |
|---------------------------------|--------------|
| d <sub>1</sub>                  | 355 mm       |
| d <sub>2</sub>                  | 224 mm       |
| d <sub>4</sub>                  | 30 mm, 36 mm |
| l <sub>1</sub> / l <sub>2</sub> | 200/160 mm   |

Netto: ~40 kg / 80 lbs  
Tara : 3.2 kg / 7.1 lbs



### Typ DWF 500 / 36

|                |        |
|----------------|--------|
| d <sub>1</sub> | 500 mm |
| d <sub>2</sub> | 315 mm |
| d <sub>4</sub> | 36 mm  |
| l <sub>1</sub> | 250 mm |

Netto: ~90 kg / 200 lbs  
Tara : 7.6 kg / 17 lbs



### Typ S41

|                |        |
|----------------|--------|
| d <sub>1</sub> | 750 mm |
| d <sub>2</sub> | 485 mm |
| d <sub>4</sub> | 400 mm |
| l <sub>1</sub> | 190 mm |

Netto: ~180 kg / 400 lbs  
Tara : 18 kg / 39 lbs



### Typ A1

|                |        |
|----------------|--------|
| d <sub>1</sub> | 750 mm |
| d <sub>2</sub> | 485 mm |
| d <sub>4</sub> | 400 mm |
| l <sub>1</sub> | 340 mm |

Netto: ~400 kg / 880 lbs  
Tara : 25 kg / 55 lbs



### Typ A2

|                |        |
|----------------|--------|
| d <sub>1</sub> | 740 mm |
| d <sub>2</sub> | 485 mm |
| d <sub>4</sub> | 400 mm |
| l <sub>1</sub> | 290 mm |


Netto: ~300 kg / 660 lbs  
Tara : 22 kg / 49 lbs



### Typ 760 / 33

|                |        |
|----------------|--------|
| d <sub>1</sub> | 760 mm |
| d <sub>2</sub> | 400 mm |
| d <sub>4</sub> | 33 mm  |
| l <sub>1</sub> | 287 mm |

Netto: ~250 kg / 550 lbs  
Tara : 40 kg / 88 lbs



### Ring / Coil / Couronne

|                |                |
|----------------|----------------|
| d <sub>1</sub> | ≤ 635   700 mm |
| d <sub>2</sub> | 400   480 mm   |
| d <sub>4</sub> |                |
| l <sub>1</sub> | 170...300 mm   |

Netto: ≤ 400 kg / 880 lbs  
[2.00 x 0.60 ... 4.50 x 1.20 mm]

Versand in Gitterboxen (GIBO) oder auf

Flachdraht-Stangen bis 4'000 mm Länge.

Weitere Spulen und Lieferformen auf Anfrage